


Comparison: 1" Pumps – Metallic


Application: Circulating Wood Stain, 24 hours per day, 365 days per year

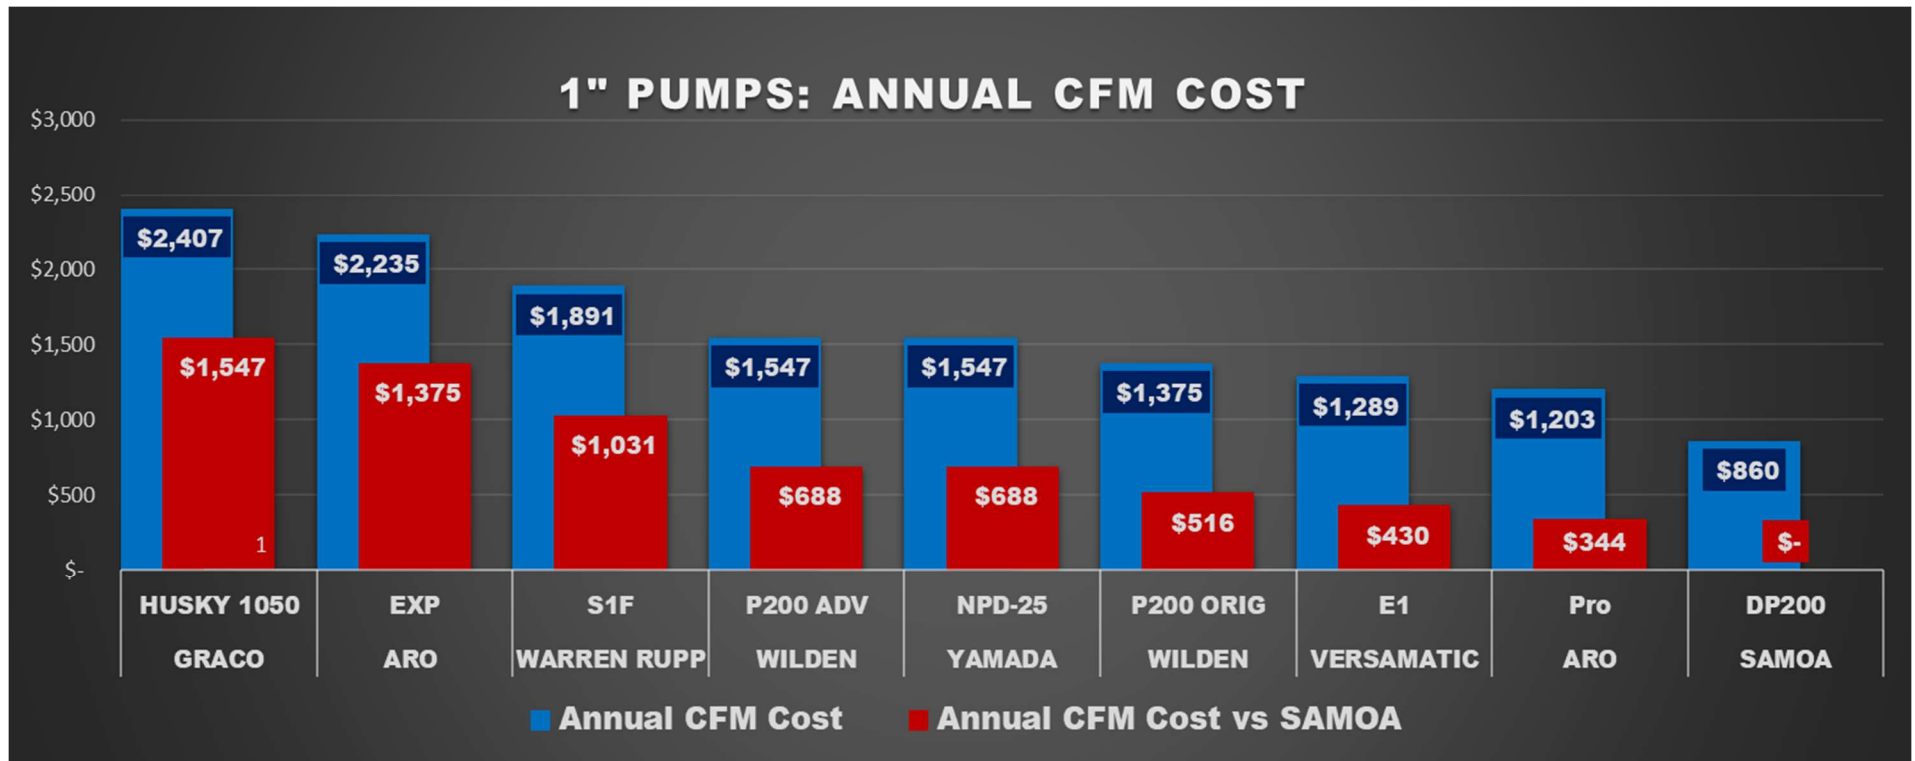

Assumptions: Application Point: 8 gpm @ 50 psi, run time 24 hrs/day, 365 days/yr, \$0.10 per KWh

Comparison: 3/4" Pumps – Metallic, PTFE


Application: 11 GPM at 40 psi, 4 hours per day, 250 days per year

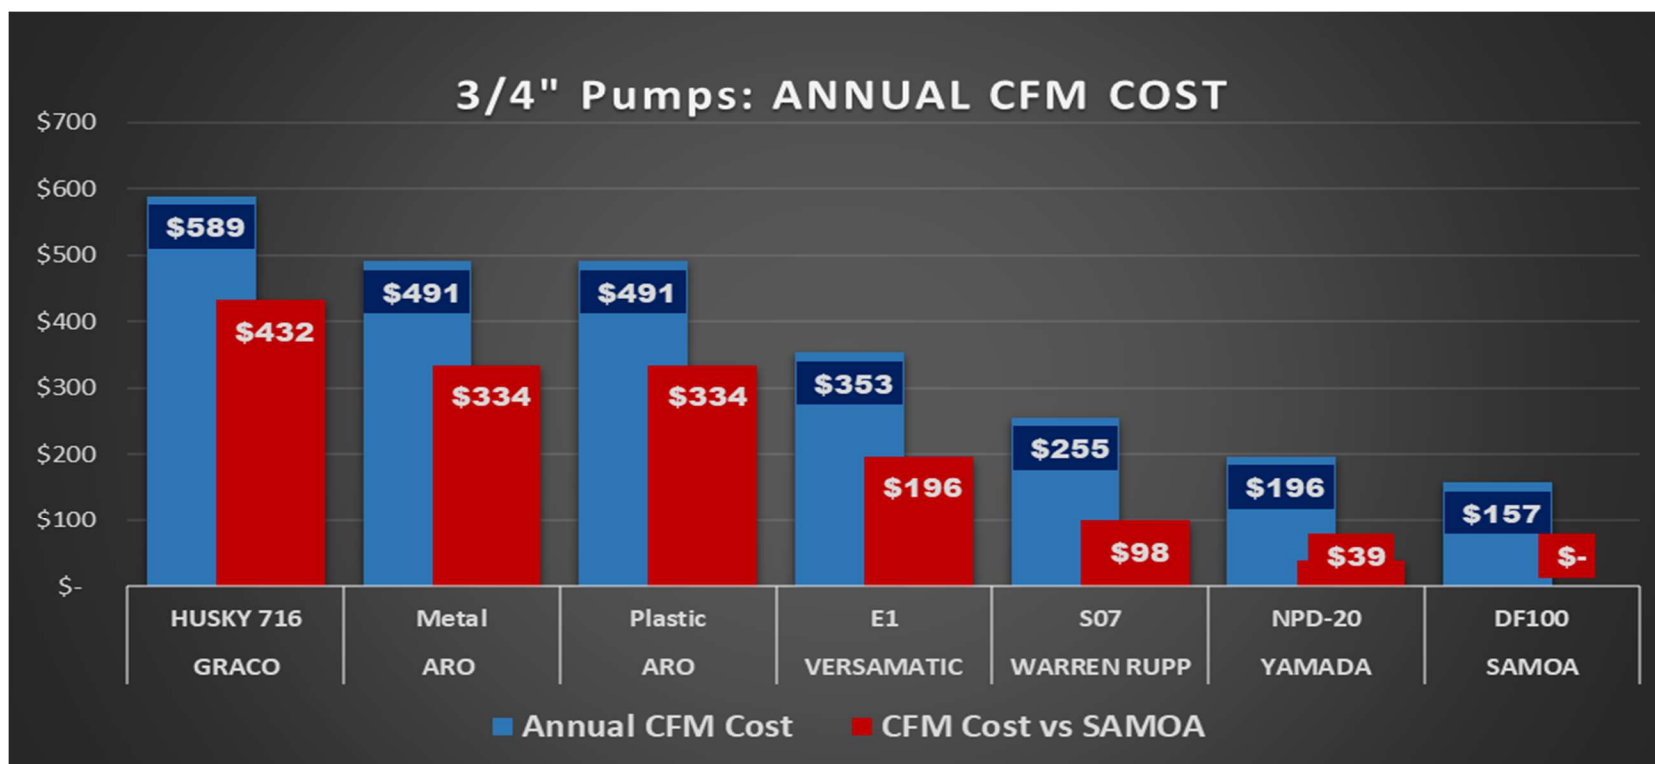

Assumptions: Application Point: 11 gpm @ 40 psi, run time 4 hrs/day, 250 days/yr, \$0.10 per Kwh

Comparison: 1/2" Pumps – Metallic, PTFE

Application: 5 GPM at 60 psi, 4 hours per day, 250 days per year

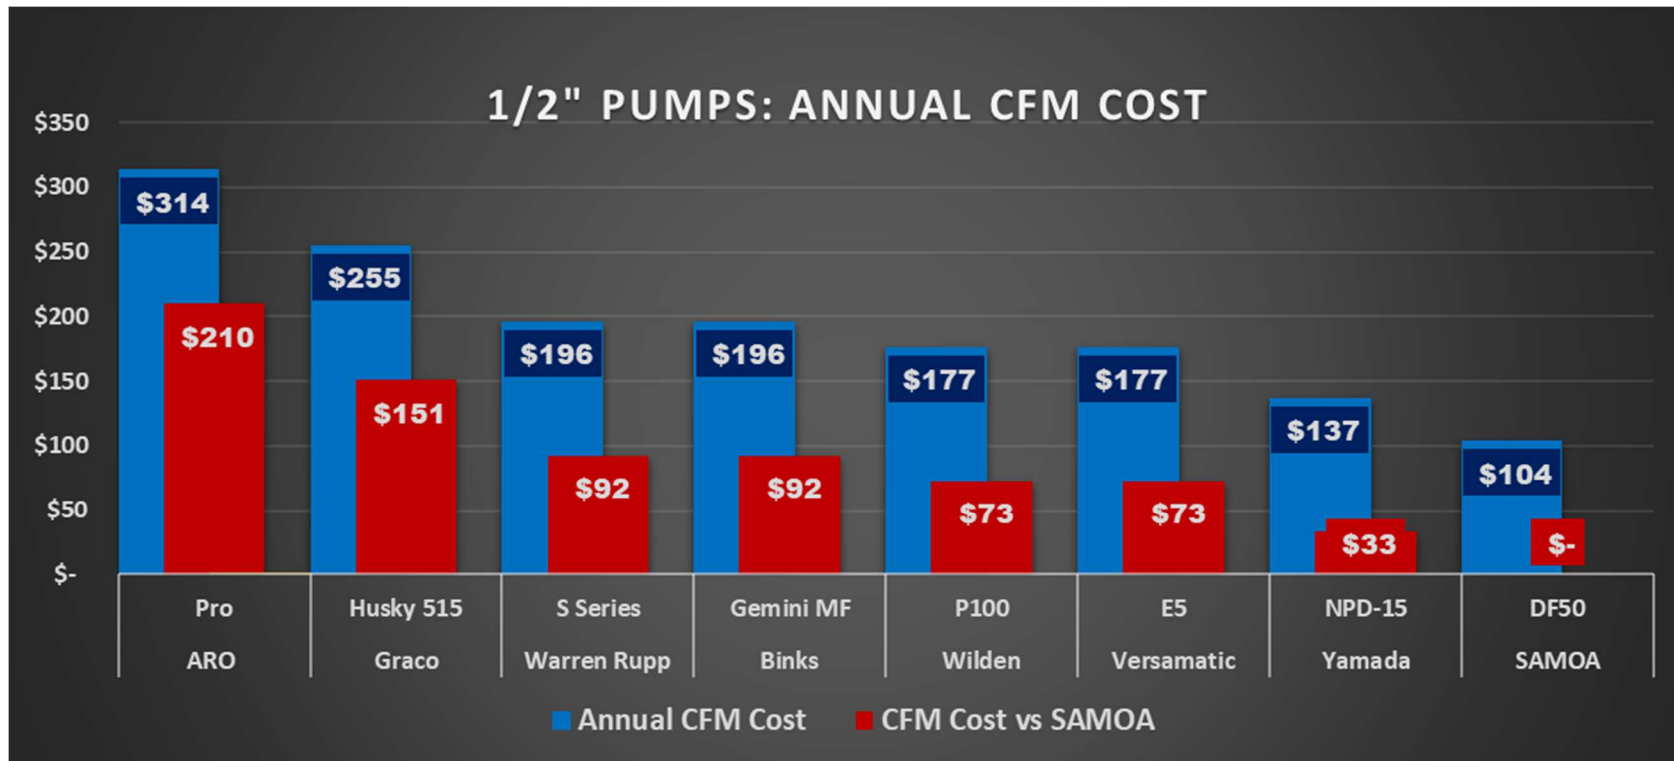

Assumptions: Application Point: 5 gpm @ 60 psi, run time 4 hrs/day, 250 days/yr, \$0.10 per kWh